


MODEL : KY-2011SRE
ROTARY HAMMER
Specification:20mm Dia

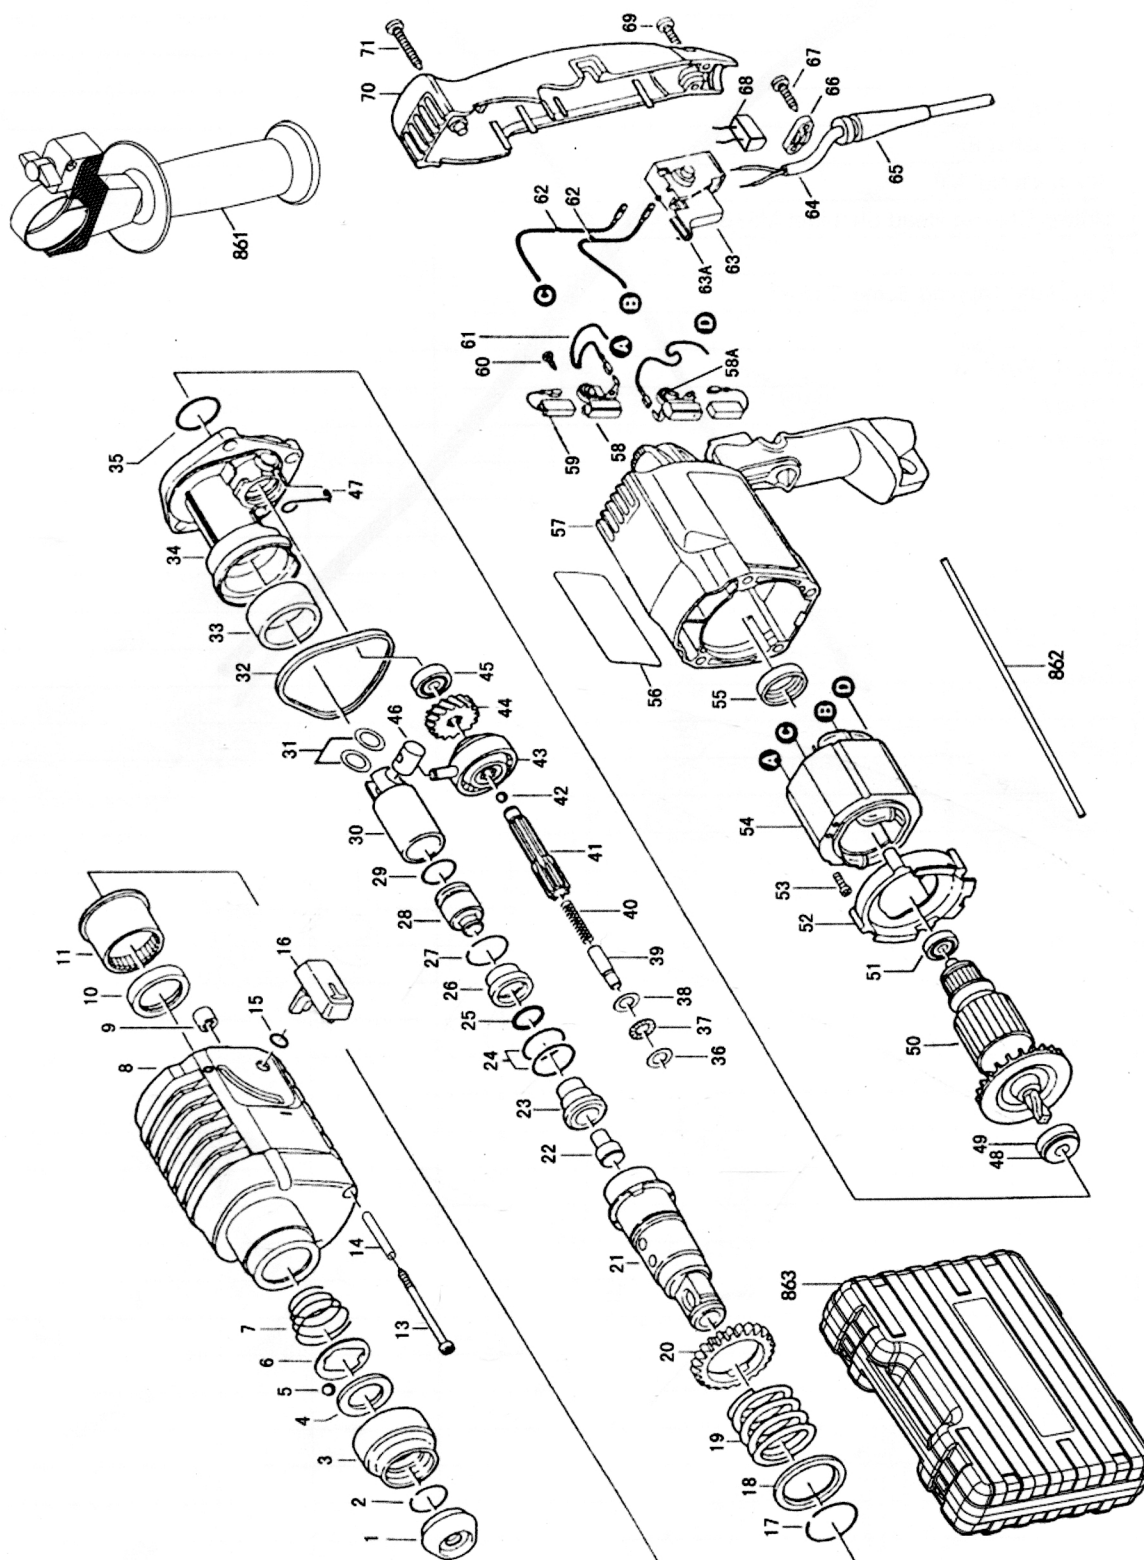

KY-2011SRE ROTARY HAMMER

No.	Description	No.	Description
1	Dust cap	41	Center spindle
2	Ring spring of locking sleeve 19×2	42	Spring of center spindle
3	Locking sleeve	43	Bracket oil seal
4	Washer for locking sleeve 21×32×4	44	Washer of roll pin
5	Φ7.14 steel ball	45	Roll pin AXK0614
6	Locking sleeve floriated washer	46	609 Bearing
7	Tower-shaped spring	47	rotor
8	ST4.8×76 self-tapping screw	48	607 bearing
9	Head Cover	49	Wind-stooed board
10	HK0608multi-roll bearing	50	ST3.5X10 Self-tapping
11	Oil seal 28X37X7	51	stator
12	Pull-roll	52	607 bearing sleeve
13	HK3012 multi-roll bearing	53	Brand
14	Function selector	54	Brand
15		55	Sticker
16	Outer ring spring of steel wire rotor sleeve 28X2.5	56	brand
17	Washer of spring	57	Housing Cover
18	Spring of rotor sleeve	58	Carbon brush
19	47 dens gear	59	Bracket of carbon brush
20	Rotor sleeve	60	ST3X8 self-tapping
21	spindle	61	Back housing
22	Sleeve of spindle	62	ST4.2X21 Self-tapping
23	O-ring of sleeve of spindle Φ18X3	63	ST4.2X15 self-tapping
24	O-ring of position-limited sleeve 9.6X3.5	64	Capacitor
25	Position-limited sleeve	65	M3X6 Self-tapping
26	Rotor position-limited stell wire spring 27X2	66	Switch
27	Piston	67	Cable
28	O-ring of piston 14X3	68	sleeve
29	Cylinder	69	Wire-pressed board
30	Cylinder washer	70	Clip belt
31	Cylinder pin	71	T bolt
32	Bracket oil seal	72	Bolt knob
33	sleeve of bracket	73	Handle seat
34	Bracket	74	Box of depth gauge
35	O-ring of 609 bearing 23.8X2.2	75	M6 bolt
36	Position-limited Spring of selector	76	M8 bolt
37	608 bearing	77	handle
38	21 dents inclined gear	78	Depth gauge
39	Asway-poled bearing	100	inductance
40	Steel ball C5	101	Connection wire 130mm